


L SERIES: L-SHAPED HEATERS

MODEL DL6

QUICK SPECIFICATIONS		CUSTOMIZABLE FEATURES
WATTAGES:	5,000 - 36,000 Watts	The following are configurable based on application requirements: <ul style="list-style-type: none"> • Wattage, Voltage, Phase • Immersion Length • Cold Length • Conduit Length • Element Sheath Material
VOLTAGES:	120 - 600 Volts	
PHASE:	1 & 3 Phase	
TEMP RANGE:		
UL / CSA Version : Suitable in Solutions up to 230 ° F		
Metal Head Version: Suitable in Solutions up to 300 ° F		
WATT DENSITY:	Derated to 18 Watts / in²	
For custom configurations or additional options, please consult factory.		

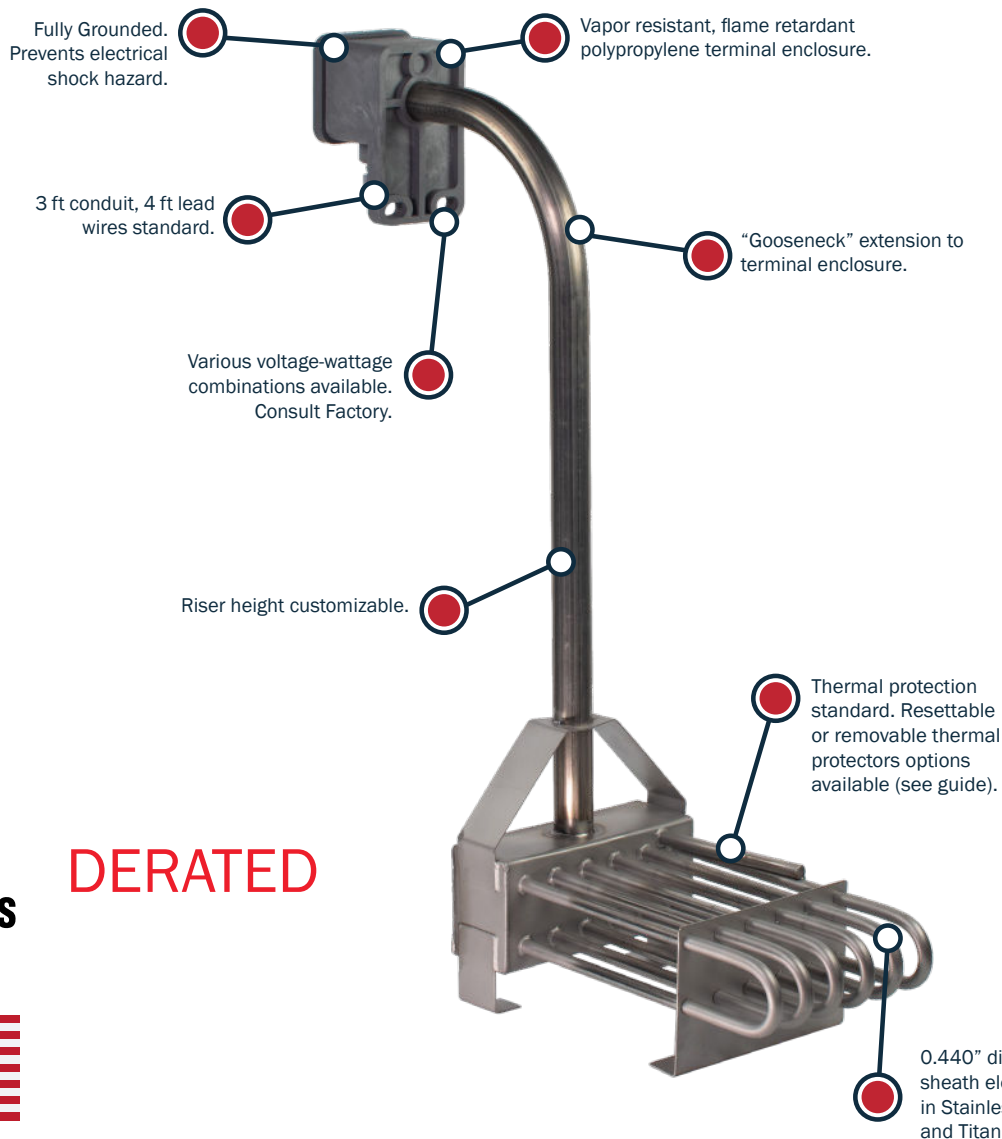


DERATED



SPECIFICATIONS				304 SS	316 SS	TITANIUM
Volts (3-PH)	Watts	Bottom Length	Vertical Height	Part Number	Part Number	Part Number
240	1,500	13"	37"	DL6F1.5E13R37S2-T*	DL6S1.5E13R37S2-T*	DL6T1.5E13R37S2-T*
480				DL6F1.5M13R37S2-T*	DL6S1.5M13R37S2-T*	DL6T1.5M13R37S2-T*
240	3,000	17"		DL6F3E17R37S2-T*	DL6S3E17R37S2-T*	DL6T3E17R37S2-T*
480				DL6F3M17R37S2-T*	DL6S3M17R37S2-T*	DL6T3M17R37S2-T*
240	4,500	22"		DL6F4.5E22R37S2-T*	DL6S4.5E22R37S2-T*	DL6T4.5E22R37S2-T*
480				DL6F4.5M22R37S2-T*	DL6S4.5M22R37S2-T*	DL6T4.5M22R37S2-T*
240	6,000	26"		DL6F6E26R37S2-T*	DL6S6E26R37S2-T*	DL6T6E26R37S2-T*
480				DL6F6M26R37S2-T*	DL6S6M26R37S2-T*	DL6T6M26R37S2-T*
240	7,500	31"		DL6F7.5E31R37S2-T*	DL6S7.5E31R37S2-T*	DL6T7.5E31R37S2-T*
480				DL6F7.5M31R37S2-T*	DL6S7.5M31R37S2-T*	DL6T7.5M31R37S2-T*
240	9,000	36"		DL6F9E36R50S2-T*	DL6S9E36R50S2-T*	DL6T9E36R50S2-T*
480				DL6F9M36R50S2-T*	DL6S9M36R50S2-T*	DL6T9M36R50S2-T*
240	10,500	40"	DL6F10.5E40R50S2-T*	DL6S10.5E40R50S2-T*	DL6T10.5E40R50S2-T*	
480			DL6F10.5M40R50S2-T*	DL6S10.5M40R50S2-T*	DL6T10.5M40R50S2-T*	
240	12,000	44"	DL6F12E44R50S2-T*	DL6S12E44R50S2-T*	DL6T12E44R50S2-T*	
480			DL6F12M44R50S2-T*	DL6S12M44R50S2-T*	DL6T12M44R50S2-T*	
240	13,500	50"	DL6F13.5E50R50S2-T*	DL6S13.5E50R50S2-T*	DL6T13.5E50R50S2-T*	
480			DL6F13.5M50R50S2-T*	DL6S13.5M50R50S2-T*	DL6T13.5M50R50S2-T*	
240	15,000	55"	DL6F15E55R50S2-T*	DL6S15E55R50S2-T*	DL6T15E55R50S2-T*	
480			DL6F15M55R50S2-T*	DL6S15M55R50S2-T*	DL6T15M55R50S2-T*	
240	18,000	64"	DL6F18E64R50S2-T*	DL6S18E64R50S2-T*	DL6T18E64R50S2-T*	
480			DL6F18M64R50S2-T*	DL6S18M64R50S2-T*	DL6T18M64R50S2-T*	

*Thermal protector options and part numbers can be found in the table below.
Derated to 18 Watts per Square Inch Standard.

REFERENCE DIMENSIONS

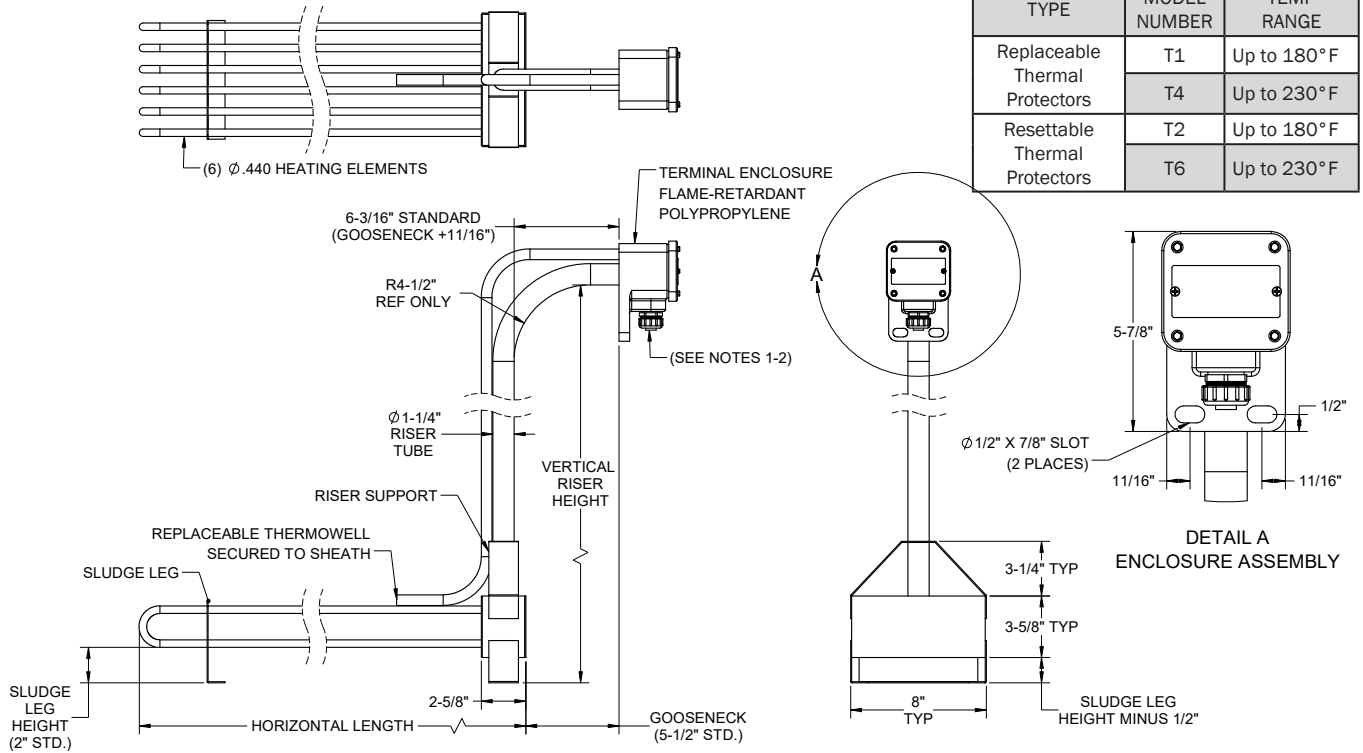

Thermal Protector Guide		
TYPE	MODEL NUMBER	TEMP RANGE
Replaceable Thermal Protectors	T1	Up to 180° F
	T4	Up to 230° F
Resettable Thermal Protectors	T2	Up to 180° F
	T6	Up to 230° F

ORDERING AND CONTACT INFO

FOR ORDERS, PLEASE CONTACT YOUR LOCAL METAL FINISHING EQUIPMENT SUPPLIER.
FOR MORE INFO ON OUR PRODUCTS SEE OUR WEBSITE AT WWW.HEATMAXHEATERS.COM