


L SERIES: L-SHAPED HEATERS

MODEL L3

QUICK SPECIFICATIONS		CUSTOMIZABLE FEATURES
WATTAGES:	5,000 - 18,000 Watts	The following are configurable based on application requirements: <ul style="list-style-type: none"> • Wattage, Voltage, Phase • Immersion Length • Cold Length • Conduit Length • Element Sheath Material
VOLTAGES:	120 - 600 Volts	
PHASE:	1 & 3 Phase	
TEMP RANGE:		
UL / CSA Version : Suitable in Solutions up to 230 ° F		
Metal Head Version: Suitable in Solutions up to 300 ° F		
WATT DENSITY:	35 Watts / in² Standard	
For custom configurations or additional options, please consult factory.		




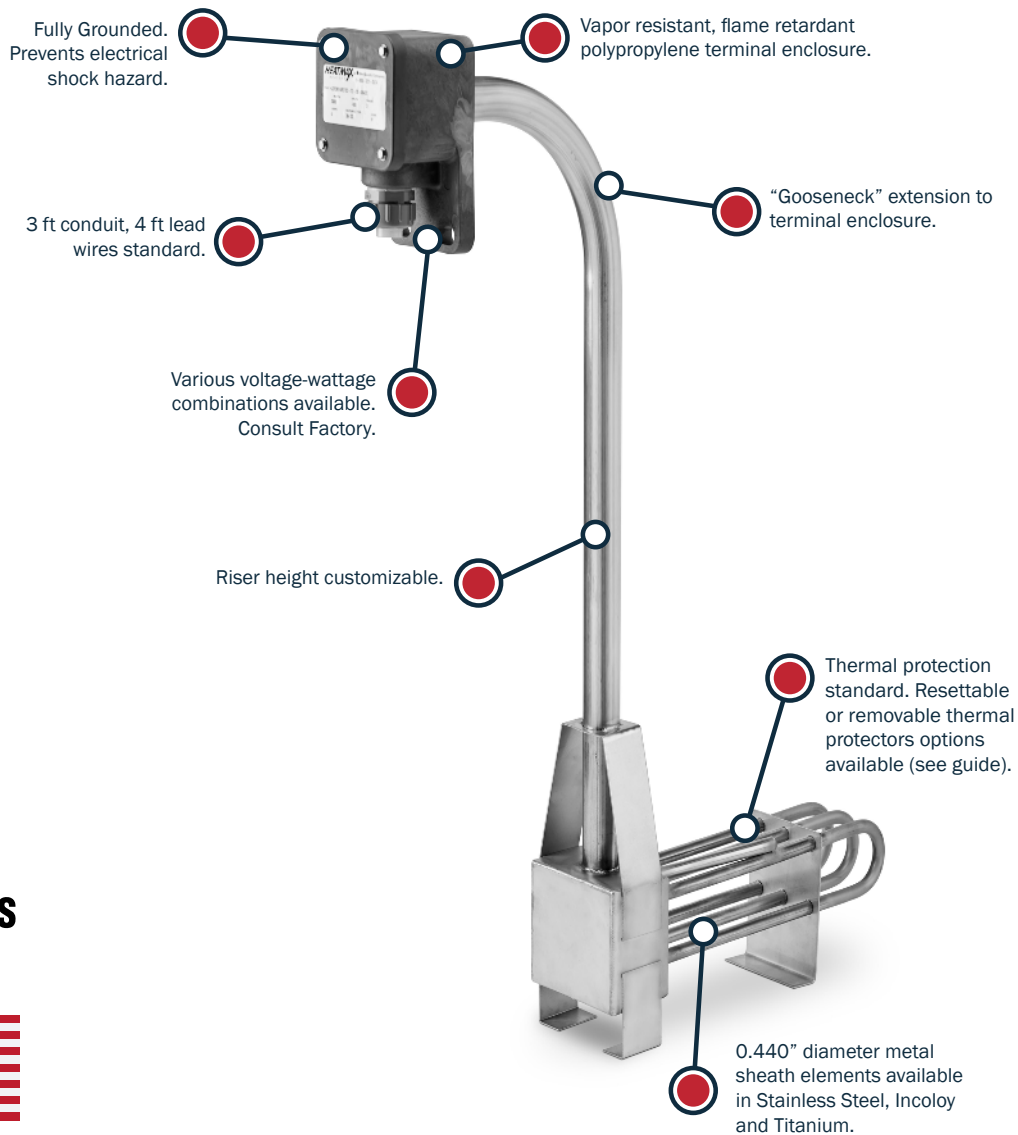

L3 METAL L-SHAPE HEATERS						
SPECIFICATIONS				304 SS	316 SS	TITANIUM
Volts (1-PH)	Watts	Bottom Length	Vertical Height*	Part Number	Part Number	Part Number
120	1,000	13"	37"	L3F1AX13R37S2-T*	L3S1AX13R37S2-T*	L3T1AX13R37S2-T*
240				L3F1EX13R37S2-T*	L3S1EX13R37S2-T*	L3T1EX13R37S2-T*
120	2,000	17"		L3F2AX17R37S2-T*	L3S2AX17R37S2-T*	L3T2AX17R37S2-T*
240				L3F2EX17R37S2-T*	L3S2EX17R37S2-T*	L3T2EX17R37S2-T*
240	3,000	22"		L3F3EX22R37S2-T*	L3S3EX22R37S2-T*	L3T3EX22R37S2-T*
480				L3F3MX22R37S2-T*	L3S3MX22R37S2-T*	L3T3MX22R37S2-T*
240	4,000	26"		L3F4EX26R37S2-T*	L3S4EX26R37S2-T*	L3T4EX26R37S2-T*
480				L3F4MX26R37S2-T*	L3S4MX26R37S2-T*	L3T4MX26R37S2-T*
240	5,000	31"		L3F5EX31R37S2-T*	L3S5EX31R37S2-T*	L3T5EX31R37S2-T*
480				L3F5MX31R37S2-T*	L3S5MX31R37S2-T*	L3T5MX31R37S2-T*
240	6,000	36"		L3F6EX36R50S2-T*	L3S6EX36R50S2-T*	L3T6EX36R50S2-T*
480				L3F6MX36R50S2-T*	L3S6MX36R50S2-T*	L3T6MX36R50S2-T*
240	8,000	44"	L3F8EX44R50S2-T*	L3S8EX44R50S2-T*	L3T8EX44R50S2-T*	
480			L3F8MX44R50S2-T*	L3S8MX44R50S2-T*	L3T8MX44R50S2-T*	
240	9,000	50"	L3F9EX50R50S2-T*	L3S9EX50R50S2-T*	L3T9EX50R50S2-T*	
480			L3F9MX50R50S2-T*	L3S9MX50R50S2-T*	L3T9MX50R50S2-T*	
240	10,000	55"	L3F10EX55R50S2-T*	L3S10EX55R50S2-T*	L3T10EX55R50S2-T*	
480			L3F10MX55R50S2-T*	L3S10MX55R50S2-T*	L3T10MX55R50S2-T*	
480	12,000	64"	L3F12MX64R50S2-T*	L3S12MX64R50S2-T*	L3T12MX64R50S2-T*	
480	15,000	65"	L3F15MX65R50S2-T*	L3S15MX65R50S2-T*	L3T15MX65R50S2-T*	
480	18,000	67"	L3F18MX67R50S2-T*	L3S18MX67R50S2-T*	L3T18MX67R50S2-T*	

*Thermal protector options and part numbers can be found in the table below.

REFERENCE DIMENSIONS

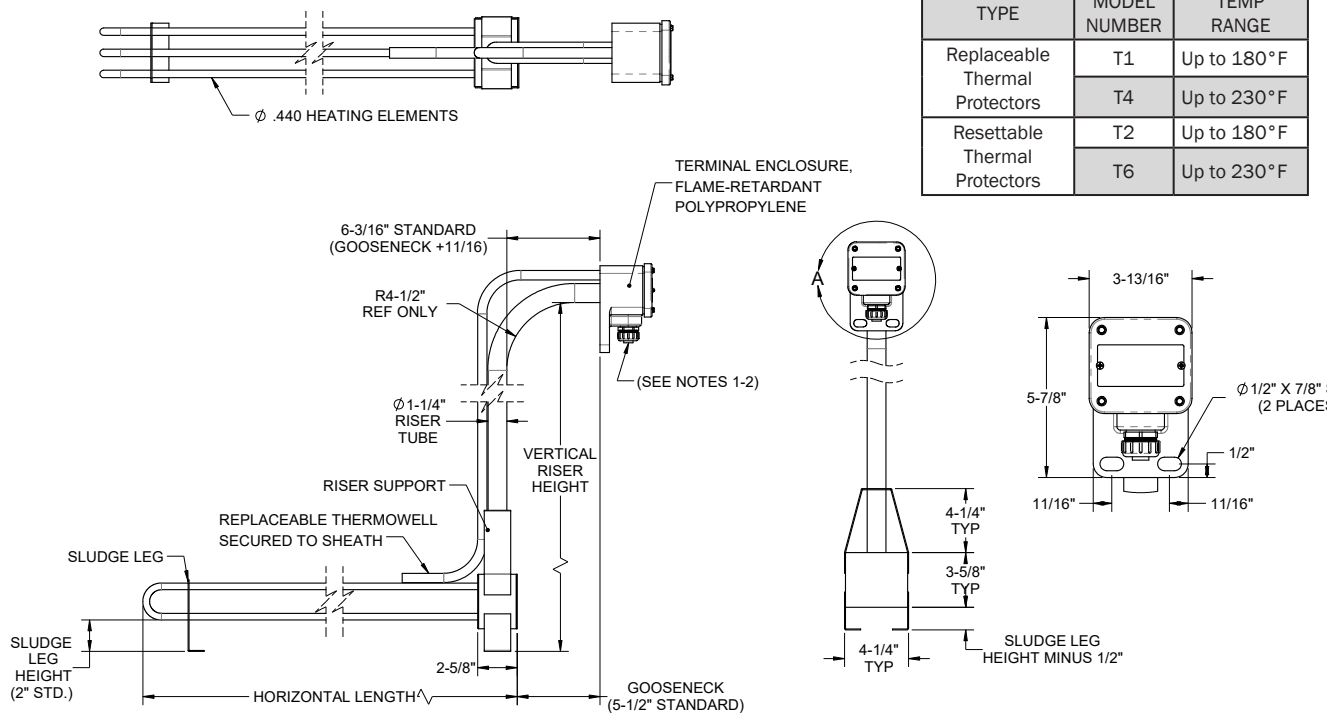

Thermal Protector Guide		
TYPE	MODEL NUMBER	TEMP RANGE
Replaceable Thermal Protectors	T1	Up to 180° F
	T4	Up to 230° F
Resettable Thermal Protectors	T2	Up to 180° F
	T6	Up to 230° F

ORDERING AND CONTACT INFO

FOR ORDERS, PLEASE CONTACT YOUR LOCAL METAL FINISHING EQUIPMENT SUPPLIER.
FOR MORE INFO ON OUR PRODUCTS SEE OUR WEBSITE AT WWW.HEATMAXHEATERS.COM