


LV SERIES: L-SHAPED HEATERS

MODEL L6V


QUICK SPECIFICATIONS		CUSTOMIZABLE FEATURES
WATTAGES:	5,000 - 36,000 Watts	The following are configurable based on application requirements: <ul style="list-style-type: none"> • Wattage, Voltage, Phase • Immersion Length • Cold Length • Conduit Length • Element Sheath Material
VOLTAGES:	120 - 600 Volts	
PHASE:	1 & 3 Phase	
TEMP RANGE:		
UL / CSA Version : Suitable in Solutions up to 230 ° F		
Metal Head Version: Suitable in Solutions up to 300 ° F		
WATT DENSITY:	35 Watts / in² Standard	
For custom configurations or additional options, please consult factory.		

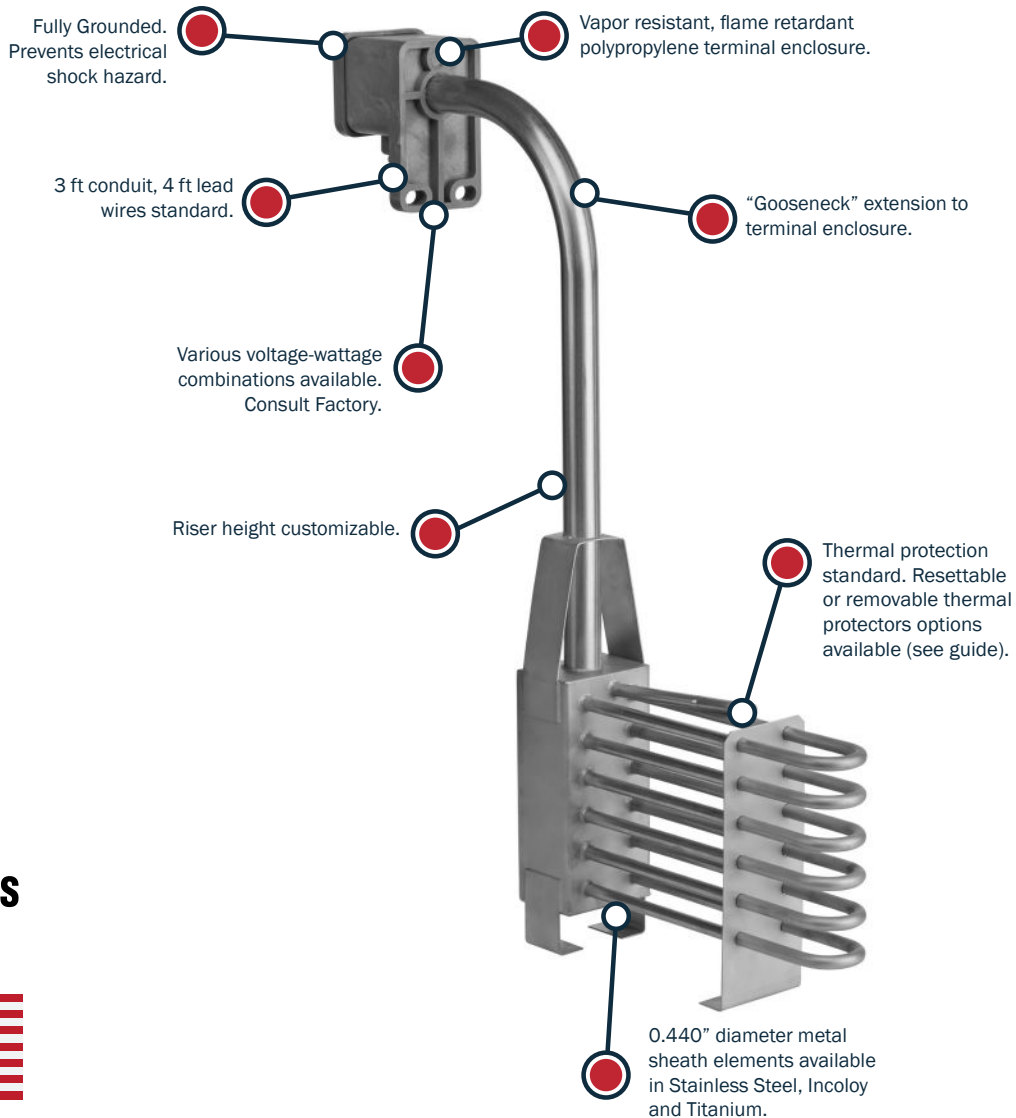

L6V VERTICALLY STACKED L-SHAPE HEATERS							
SPECIFICATIONS				304 SS	316 SS	TITANIUM	
Volts (3-PH)	Watts	Bottom Length	Vertical Height	Part Number	Part Number	Part Number	
240	3,000	13"	37"	L6VF3E13R37S2-T*	L6VS3E13R37S2-T*	L6VT3E13R37S2-T*	
480				L6VF3M13R37S2-T*	L6VS3M13R37S2-T*	L6VT3M13R37S2-T*	
240	6,000	17"		L6VF6E17R37S2-T*	L6VS6E17R37S2-T*	L6VT6E17R37S2-T*	
480				L6VF6M17R37S2-T*	L6VS6M17R37S2-T*	L6VT6M17R37S2-T*	
240	9,000	22"		L6VF9E22R37S2-T*	L6VS9E22R37S2-T*	L6VT9E22R37S2-T*	
480				L6VF9M22R37S2-T*	L6VS9M22R37S2-T*	L6VT9M22R37S2-T*	
240	12,000	26"		L6VF12E26R37S2-T*	L6VS12E26R37S2-T*	L6VT12E26R37S2-T*	
480				L6VF12M26R37S2-T*	L6VS12M26R37S2-T*	L6VT12M26R37S2-T*	
240	15,000	31"		L6VF15E31R37S2-T*	L6VS15E31R37S2-T*	L6VT15E31R37S2-T*	
480				L6VF15M31R37S2-T*	L6VS15M31R37S2-T*	L6VT15M31R37S2-T*	
240	18,000	36"		50"	L6VF18E36R50S2-T*	L6VS18E36R50S2-T*	L6VT18E36R50S2-T*
480					L6VF18M36R50S2-T*	L6VS18M36R50S2-T*	L6VT18M36R50S2-T*
480	21,000	40"	L6VF21M40R50S2-T*		L6VS21M40R50S2-T*	L6VT21M40R50S2-T*	
480	24,000	44"	L6VF24M44R50S2-T*		L6VS24M44R50S2-T*	L6VT24M44R50S2-T*	
480	27,000	50"	L6VF27M50R50S2-T*		L6VS27M50R50S2-T*	L6VT27M50R50S2-T*	
480	30,000	55"	L6VF30M55R50S2-T*		L6VS30M55R50S2-T*	L6VT30M55R50S2-T*	
480	36,000	64"	L6VF36M64R50S2-T*		L6VS36M64R50S2-T*	L6VT36M64R50S2-T*	

*Thermal protector options and part numbers can be found in the table below.

REFERENCE DIMENSIONS

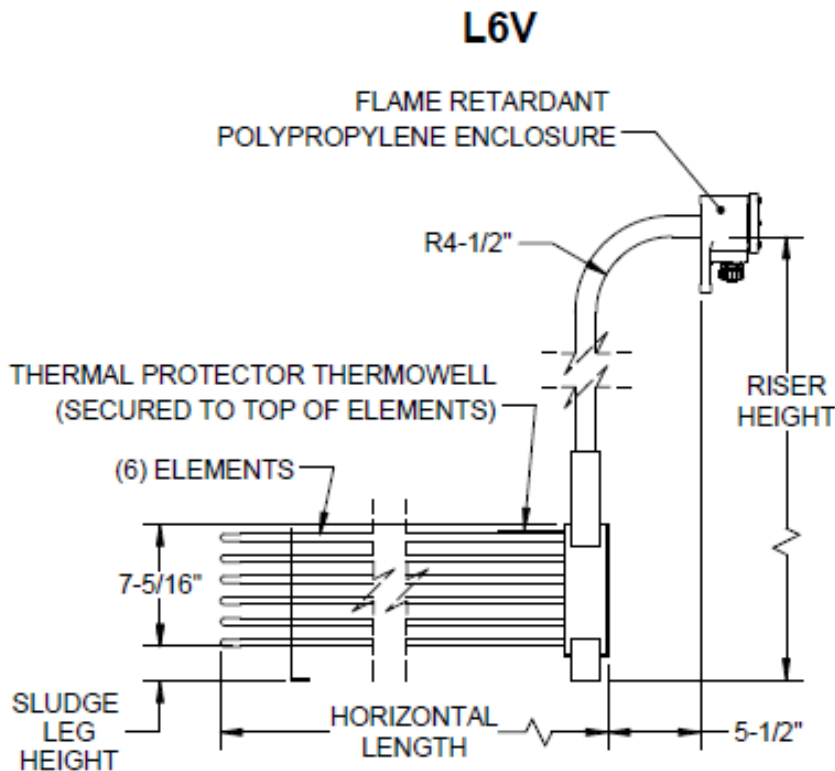

Thermal Protector Guide		
TYPE	MODEL NUMBER	TEMP RANGE
Replaceable Thermal Protectors	T1	Up to 180° F
	T4	Up to 230° F
Resettable Thermal Protectors	T2	Up to 180° F
	T6	Up to 230° F

ORDERING AND CONTACT INFO

FOR ORDERS, PLEASE CONTACT YOUR LOCAL METAL FINISHING EQUIPMENT SUPPLIER.
FOR MORE INFO ON OUR PRODUCTS SEE OUR WEBSITE AT WWW.HEATMAXHEATERS.COM