


# LV SERIES: L-SHAPED HEATERS

## MODEL L9V

QUICK SPECIFICATIONS		CUSTOMIZABLE FEATURES
<b>WATTAGES:</b>	5,000 - 36,000 Watts	The following are configurable based on application requirements: <ul style="list-style-type: none"> <li>• Wattage, Voltage, Phase</li> <li>• Immersion Length</li> <li>• Cold Length</li> <li>• Conduit Length</li> <li>• Element Sheath Material</li> </ul>
<b>VOLTAGES:</b>	120 - 600 Volts	
<b>PHASE:</b>	1 & 3 Phase	
<b>TEMP RANGE:</b>		
UL / CSA Version : Suitable in Solutions up to <b>230 ° F</b>		
Metal Head Version: Suitable in Solutions up to <b>300 ° F</b>		
<b>WATT DENSITY:</b>	<b>35 Watts / in<sup>2</sup> Standard</b>	
For custom configurations or additional options, please consult factory.		

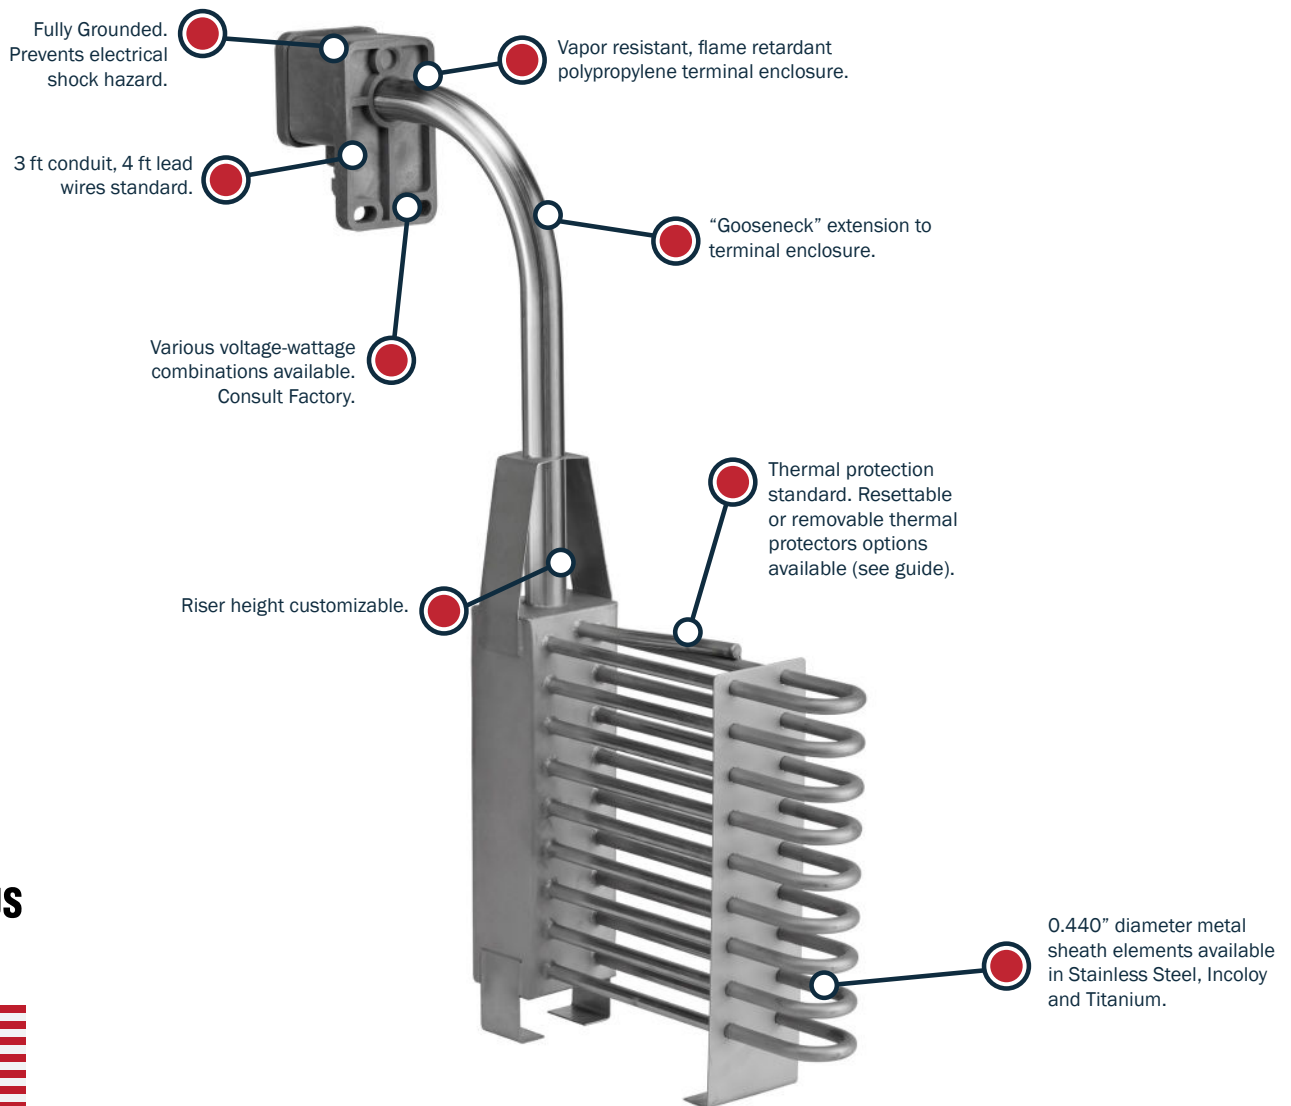


US



L9V VERTICALLY STACKED L-SHAPE HEATERS						
SPECIFICATIONS				304 SS	316 SS	TITANIUM
Volts (3-PH)	Watts	Bottom Length	Vertical Height	Part Number	Part Number	Part Number
240	6,000	12"	50"	L9VF6E12R50S2-T*	L9VS6E12R50S2-T*	L9VT6E12R50S2-T*
480				L9VF6M12R50S2-T*	L9VS6M12R50S2-T*	L9VT6M12R50S2-T*
240	9,000	15"		L9VF9E15R50S2-T*	L9VS9E15R50S2-T*	L9VT9E15R50S2-T*
480				L9VF9M15R50S2-T*	L9VS9M15R50S2-T*	L9VT9M15R50S2-T*
240	12,000	18"		L9VF12E18R50S2-T*	L9VS12E18R50S2-T*	L9VT12E18R50S2-T*
480				L9VF12M18R50S2-T*	L9VS12M18R50S2-T*	L9VT12M18R50S2-T*
240	15,000	22"		L9VF15E22R50S2-T*	L9VS15E22R50S2-T*	L9VT15E22R50S2-T*
480				L9VF15M22R50S2-T*	L9VS15M22R50S2-T*	L9VT15M22R50S2-T*
240	18,000	25"		L9VF18E25R50S2-T*	L9VS18E25R50S2-T*	L9VT18E25R50S2-T*
480				L9VF18M25R50S2-T*	L9VS18M25R50S2-T*	L9VT18M25R50S2-T*
480	21,000	29"		L9VF21M29R50S2-T*	L9VS21M29R50S2-T*	L9VT21M29R50S2-T*
480	24,000	32"		L9VF24M32R50S2-T*	L9VS24M32R50S2-T*	L9VT24M32R50S2-T*
480	27,000	36"		L9VF27M36R50S2-T*	L9VS27M36R50S2-T*	L9VT27M36R50S2-T*
480	30,000	39"		L9VF30M39R50S2-T*	L9VS30M39R50S2-T*	L9VT30M39R50S2-T*
480	36,000	55"		L9VF36M55R50S2-T*	L9VS36M55R50S2-T*	L9VT36M55R50S2-T*

\*Thermal protector options and part numbers can be found in the table below.

## REFERENCE DIMENSIONS

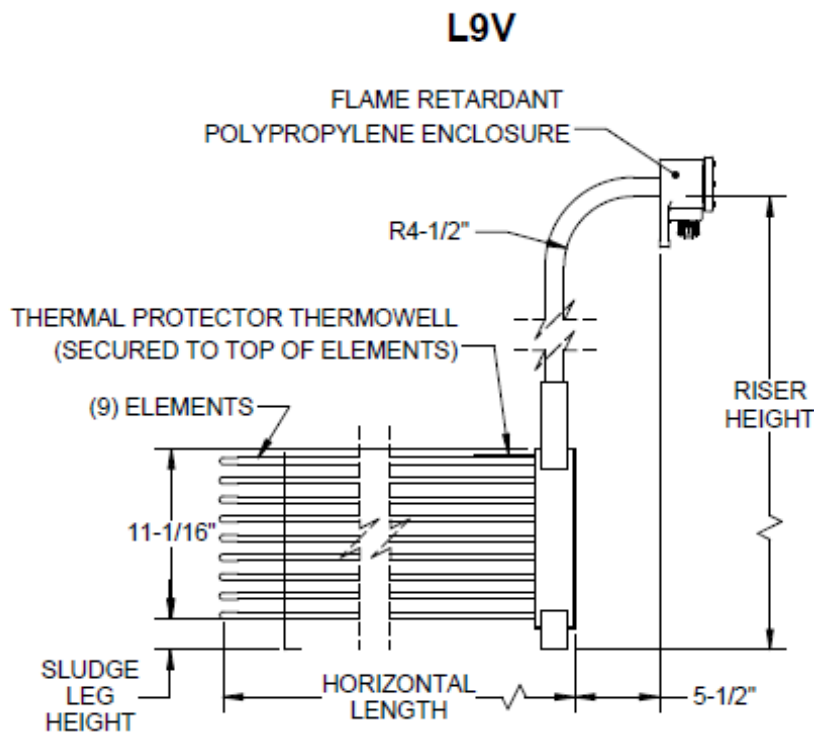

Thermal Protector Guide		
TYPE	MODEL NUMBER	TEMP RANGE
Replaceable Thermal Protectors	T1	Up to 180°F
	T4	Up to 230°F
Resettable Thermal Protectors	T2	Up to 180°F
	T6	Up to 230°F

## ORDERING AND CONTACT INFO

FOR ORDERS, PLEASE CONTACT YOUR LOCAL METAL FINISHING EQUIPMENT SUPPLIER.  
FOR MORE INFO ON OUR PRODUCTS SEE OUR WEBSITE AT [WWW.HEATMAXHEATERS.COM](http://WWW.HEATMAXHEATERS.COM)