


TFCL SERIES: PTFE COILED HEATERS

MODEL TFCL


QUICK SPECIFICATIONS		CUSTOMIZABLE FEATURES
WATTAGES:	500 - 3,500 Watts	The following are configurable based on application requirements: <ul style="list-style-type: none"> • Wattage and Voltage Combinations • Immersion Length • Cold Length • Conduit and Lead Wire Length
VOLTAGES:	120 - 600 Volts	
PHASE:	Single Phase Only	
TEMP RANGE:	Suitable in Solutions up to 212 °F	
WATT DENSITY:	10 Watts / in² Standard	
CERTIFICATION:	cULus Listed	

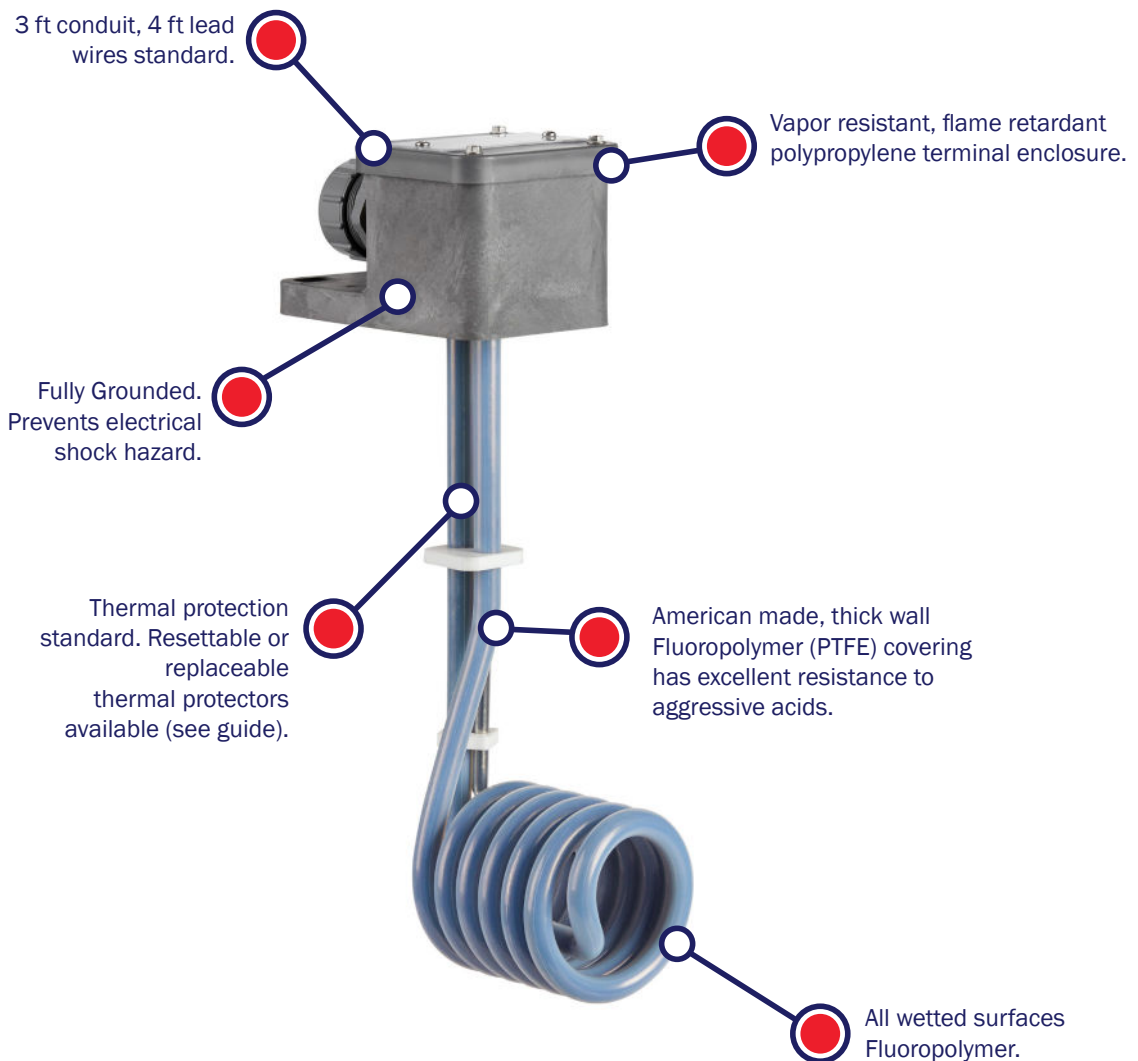

TFCL PTFE HEATERS						
PART NUMBER	SPECIFICATIONS					
	Volts (1-PH)	Watts	Horizontal Length	Vertical Immersion Length	Standard Cold Length	Max Cold Length
TFCL-1-05A3BR11-T*	120	500	3.5"	11"	6"	40"
TFCL-1-05E3BR11-T*	240					
TFCL-1-1A5R11-T*	120	1,000	5"	11"	6"	40"
TFCL-1-1E5R11-T*	240					
TFCL-1-1.5A7R11-T*	120	1,500	7"	11"	6"	40"
TFCL-1-1.5E7R11-T*	240					
TFCL-1-2E9R17-T*	240	2,000	9"	17"	12"	40"
TFCL-1-2M9R17-T*	480					
TFCL-1-2.5E11R17-T*	240	2,500	11"	17"	12"	40"
TFCL-1-2.5M11R17-T*	480					
TFCL-1-3E12BR23-T*	240	3,000	12.5"	23"	18"	35"
TFCL-1-3M12BR23-T*	480					
TFCL-1-3.5E14BR23-T*	240	3,500	14.5"	23"	18"	20"
TFCL-1-3.5M14BR23-T*	480					

*Thermal protector options and part numbers can be found in the below table.

REFERENCE DIMENSIONS

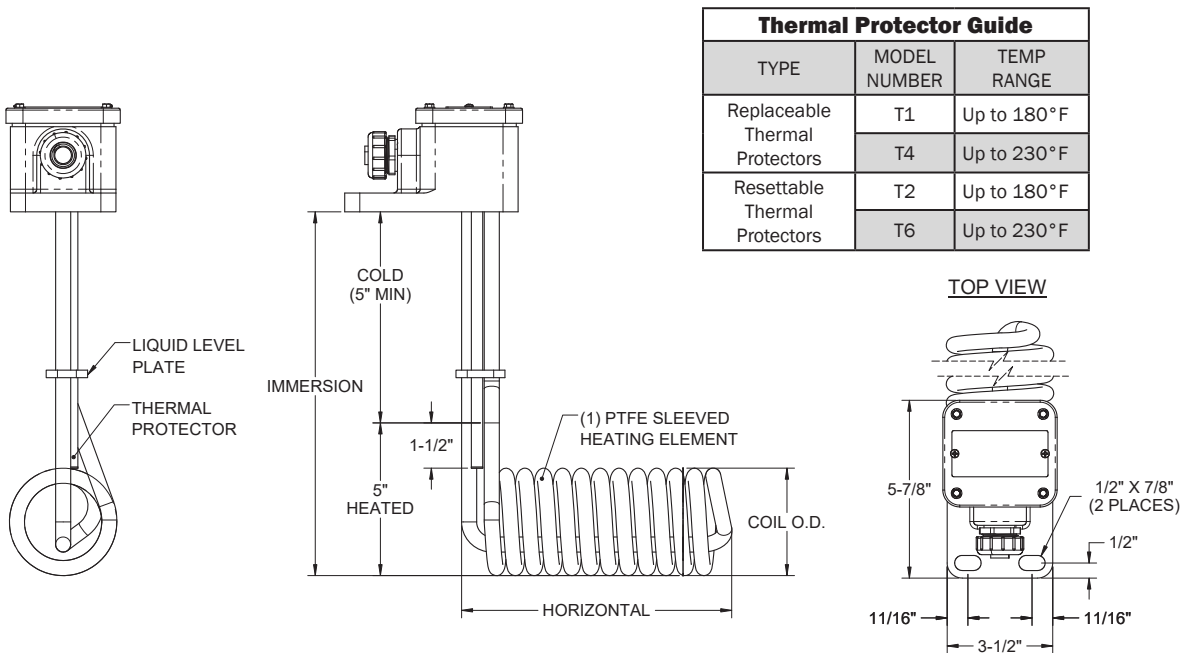

ORDERING AND CONTACT INFO

FOR ORDERS, PLEASE CONTACT YOUR LOCAL METAL FINISHING EQUIPMENT SUPPLIER.
FOR MORE INFO ON OUR PRODUCTS SEE OUR WEBSITE AT WWW.HEATMAXHEATERS.COM